

LIFTERS ACCESSORIES

Telescopic Lifters Accessories



AW 135 AW 137 AW 140 AW 150 AW 155



AW 235 AW 237 AW 240 AW 250 AW 255



AW 335 AW 337 AW 340 AW 350 AW 355



AW 1/35 AW 2/37



AW 535 AW 537 AW 540 AW 550 AW 555



AW 10 AW 11 AW 12 AW 29 AW 13

Pro / Line Array Accessories



AW 401



AW 501



AW 601



AW 402



AW 502



AW 602

Features



Powerful locking bolts.



Steel profile cap.



Reinforced base.



Automatic brake winches.



Stabilizers.




Triple safety constructions.



Certified.



Due to a policy of ensuring constant improvement, Equipson S.A. reserve the right to change the specification in materials of design of any products supplied without notice.

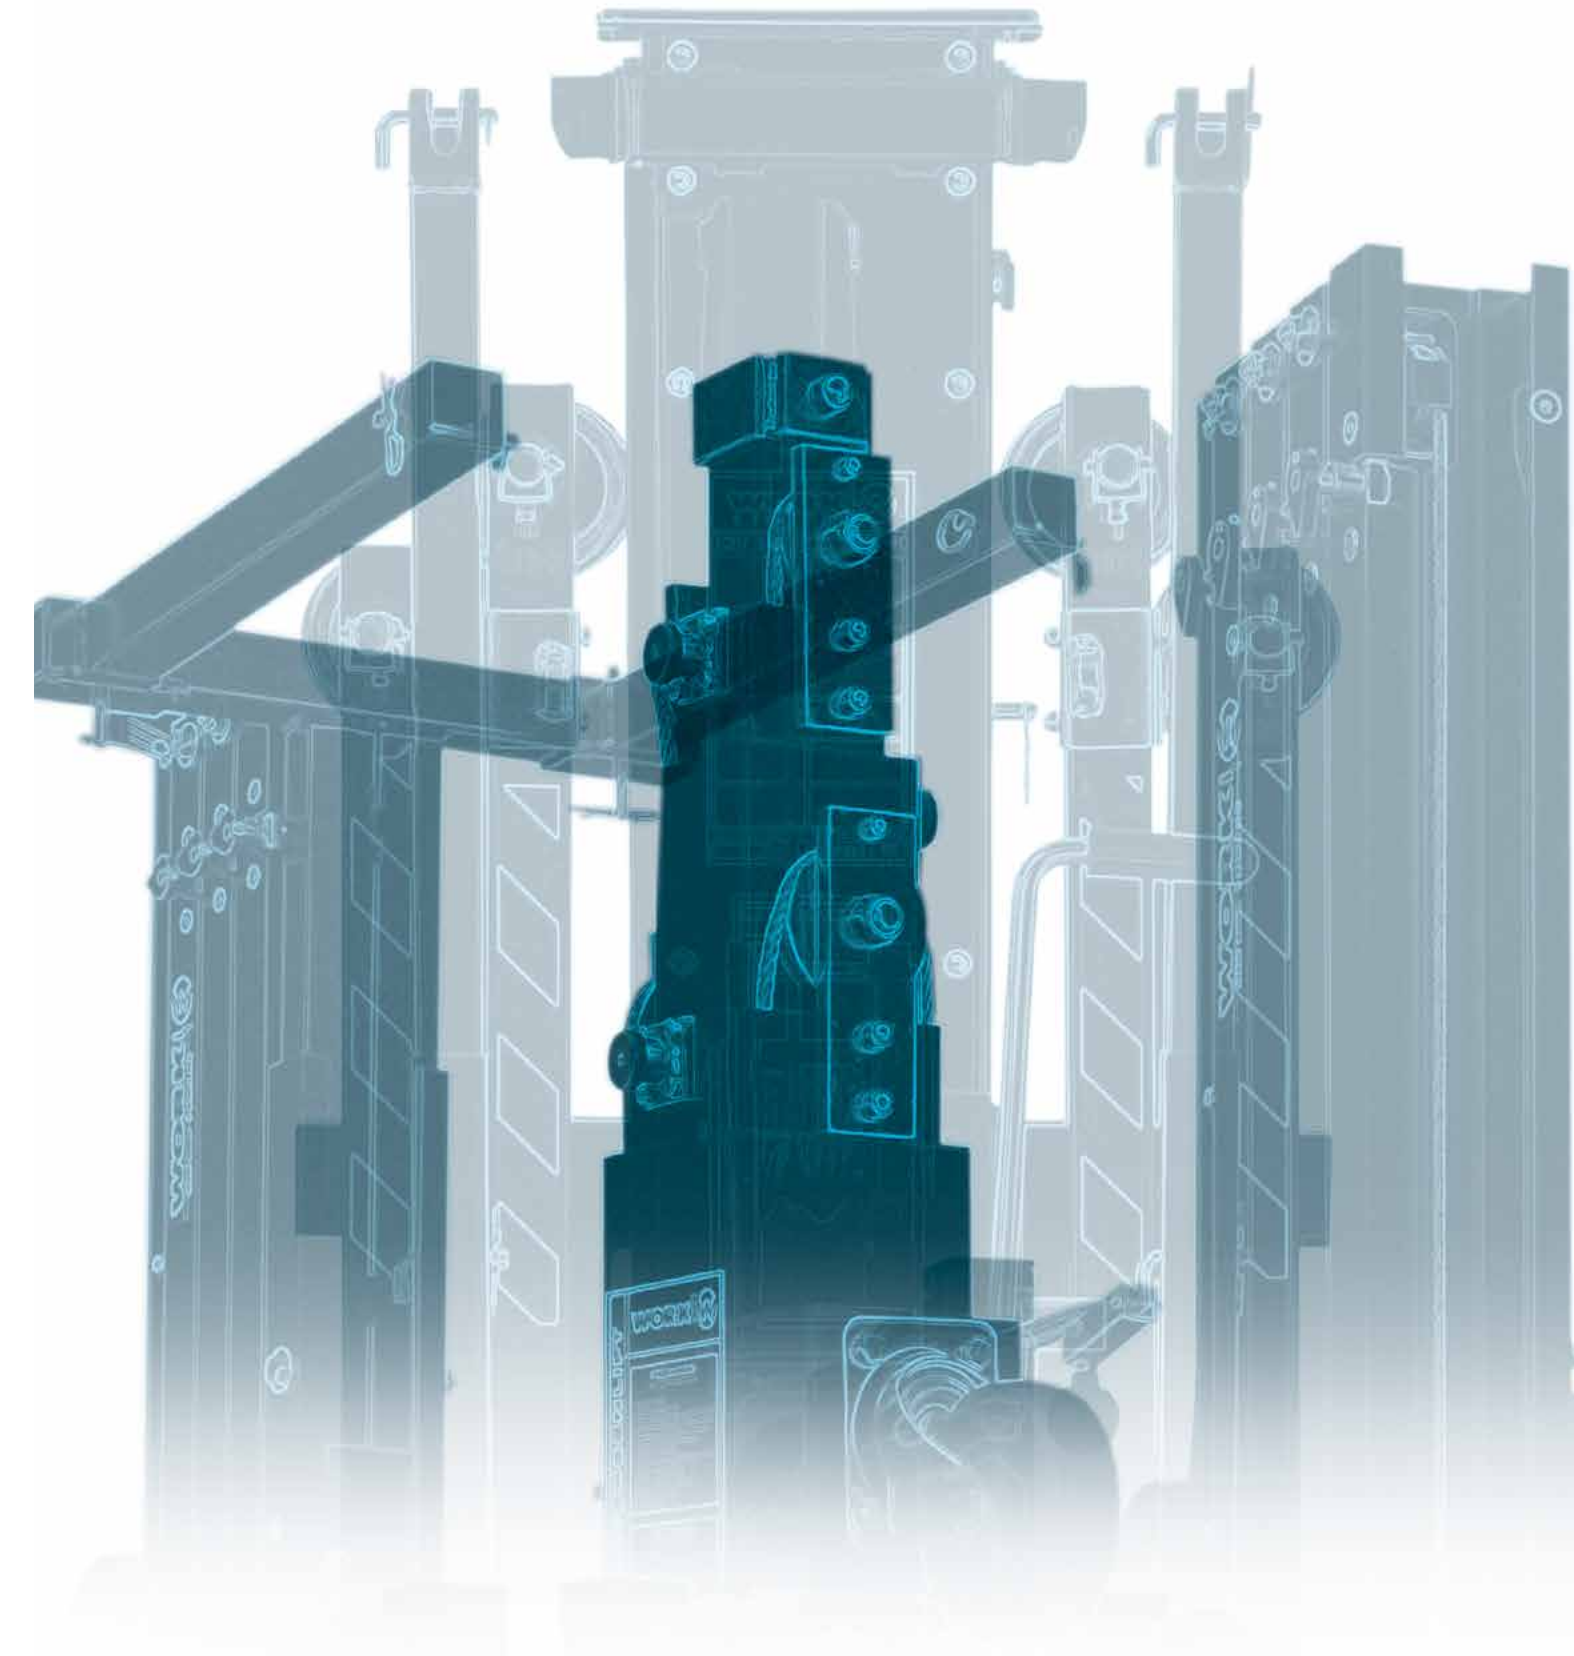

TECHNICAL DATA

TELESCOPIC LIFTERS



PRO LIFTING TOWERS



LINE ARRAY LIFTERS



	LW 135 R	LW 142 R	LW 150 R	LW 155 R	LW 185 R
Folded:					
Minimum height (cm/ ft):	193/6.33	159/5.22	190/6.23	172/5.64	172/5.64
Folded base dimensions (cm/ ft):	36x36 / 1.18x1.18	36x36 / 1.18x1.18	36x36 / 1.18x1.18	36x36 / 1.18x1.18	46x46 / 1.51x1.51
Unfolded:					
Maximum height (cm/ ft):	350/11.48	405/13.29	500/16.4	530/17.39	530/17.39
Number of profiles:	2	3	3	4	4
Leg length (cm/ ft):	89/2.92	94/3.08	103/3.38	103/3.38	103/3.38
Unfolded diameter (cm/ ft):	178/5.84	188/6.17	206/6.76	206/6.76	206/6.76
Unfolded base dimensions (cm/ ft):	126x126/4.13x4.13	129x129/4.23x4.23	146x146/4.79x4.79	149x149/4.89x4.89	149x149/4.89x4.89
Other data:					
Lifter weight (kg/lb):	24.4/53.79	28.8/63.49	32.8/72.31	43.4/95.68	73.2/161.38
Min. load (kg/lb):	25/55.12	25/55.12	25/55.12	25/55.12	25/55.12
Max. load (kg/lb):	100/220.46	100/220.46	100/220.46	150/330.69	210/462.97
Insertion diameter (mm / "):	35/1.38	35/1.38	35/1.38	35/1.38	35/1.38
Accessories:	AW 135/235/335 435 / 535 / 10	AW 135/235/335 435 / 535 / 10	AW 135/235/335 435 / 535 / 10	AW 135/235/335 435 / 535 / 10	AW 135/235/335 435 / 535 / 10
	LW 255 R	LW 265 R	LW 290 R		
Folded:					
Minimum height (cm/ ft):	173/5.68	180/5.91	184/6.04		
Folded base dimensions (cm/ ft):	46x46/1.51x1.51	46x46/1.51x1.51	46x46/1.51x1.51		
Unfolded:					
Maximum height (cm/ ft):	530/17.39	650/21.33	660/21.65		
Number of profiles:	4	5	5		
Leg length (cm/ ft):	126/4.13	126/4.13	129/4.23		
Unfolded diameter (cm/ ft):	252/8.27	252/8.27	258/8.46		
Unfolded base dimensions (cm/ ft):	178x178/5.84x5.84	178x178/5.84x5.84	179x179/5.87x5.87		
Other data:					
Lifter weight (kg/lb):	86.4/190.48	93.4/205.91	184/405.65		
Min. load (kg/lb):	25/55.12	25/55.12	25/55.12		
Max. load (kg/lb):	220/485.02	220/485.02	290/639.34		
Insertion diameter (mm / "):	55/2.17	40/1.57	50/1.97		
Accessories:	AW 155/255/355 455 / 555 / 13	AW 140/240/340 440 / 540 / 12 / 20	AW 150/250/350 450 / 550 / 29		

	LW 415 R	LW 425 R	LW 461 R	LW 476 R	LW 465 R	LW 480 R
Folded:						
Minimum height (cm/ ft):	190/6.23	190/6.23	191/6.27	191/6.27	198/6.5	198/6.5
Folded base length (cm/ ft):	48/1.57	48/1.57	48/1.57	48/1.57	63/2.07	63/2.07
Unfolded:						
Lifter maximum height (cm/ ft):	500/16.4	650/21.33	635/20.83	783/25.69	672/22.05	830/27.23
Fork maximum height (cm/ ft):	441/14.5	591/19.39	584/19.16	732/24.02	608/19.95	766/25.13
Number of profiles:	3	4	4	5	4	5
Unfolded base length (cm/ ft):	175/5.74	175/5.74	179/5.87	179/5.87	193/6.33	193/6.33
Length (from base to front legs cm/ ft):	100/3.28	100/3.28	118/3.87	118/3.87	134/4.4	134/4.4
Length (from base to back legs cm/ ft):	75/2.46	75/2.46	61/2	61/2	59/1.94	59/1.94
Unfolded diameter (cm/ ft):	253/8.3	253/8.3	260/8.53	260/8.53	275/9.02	275/9.02
Lifter base width (cm/ ft):	51/1.67	51/1.67	51/1.67	51/1.67	63/2.07	63/2.07
Front leg length (cm/ ft):	120/3.94	120/3.94	145/4.76	145/4.76	150/4.92	150/4.92
Back leg length (cm/ ft):	120/3.94	120/3.94	100/3.28	100/3.28	112/3.67	112/3.67
Distance between front legs (cm/ ft):	158/5.18	158/5.18	196/6.43	196/6.43	184/6.04	184/6.04
Distance between back legs (cm/ ft):	218/7.15	218/7.15	179/5.87	179/5.87	209/6.86	209/6.86
Fork detailed features						
Fork length (cm/ ft):	50/1.64	50/1.64	60/1.97	60/1.97	65/2.13	65/2.13
Fork width (cm/ ft):	44/1.44	44/1.44	44/1.44	44/1.44	76/2.49	76/2.49
Other data						
Lifter weight (kg/lb):	89/196.21	97.5/214.95	146.2/322.32	162/357.15	225/496.04	243/535.72
Min. load (kg/lb):	30/66.14	30/66.14	30/66.14	30/66.14	30/66.14	30/66.14
Max. load (kg/lb):	170/374.79	150/330.69	250/551.16	220/485.02	370/815.71	320/705.48
Accessories:	AW 401/402	AW 401/402	AW 401/402	AW 401/402	AW 501/502	AW 501/502

	WT 150	WT 500	WT 550	WT 600	WT 700
Folded:					
Minimum height (cm/ ft):	157/5.15	196/6.43	166/5.45	196/6.43	200/6.56
Folded base length (cm/ ft):	48/1.57	56/1.84	60/1.97	74/2.43	74/2.43
Unfolded:					
Lifter maximum height (cm/ ft):	500/16.4	598/19.62	520/17.06	650/21.33	650/21.33
Fork maximum height (cm/ ft):	489/16.04	542/17.78	512/16.08	587/19.26	587/19.26
Number of profiles:	4	4	4	4	4
Unfolded base length (cm/ ft):	175/5.74	175/5.74	184/6.04	215/7.05	215/7.05
Length (from base to front legs cm/ ft):	90/2.95	120/3.94	115/3.77	131/4.3	131/4.3
Length (from base to back legs cm/ ft):	85/2.79	65/2.13	69/2.26	82/2.69	82/2.69
Unfolded diameter (cm/ ft):	253/8.3	262/8.6	263/8.63	320/10.5	320/10.5
Lifter base width (cm/ ft):	51/1.67	66/2.17	57/1.87	75/2.46	75/2.46
Front leg length (cm/ ft):	120/3.94	144/4.72	128/4.2	163/5.35	163/5.35
Back leg length (cm/ ft):	120/3.94	100/3.28	120/3.94	135/4.43	135/4.43
Distance between front legs (cm/ ft):	163/5.35	193/6.33	164/5.38	234/7.68	234/7.68
Distance between back legs (cm/ ft):	218/7.15	191/6.27	209/6.86	251/8.23	251/8.23
Fork detailed features					
Fork length (cm/ ft):	56/1.84	65/2.13	66/2.17	103/3.38	103/3.38
Fork width (cm/ ft):	40/1.31	76/2.49	60/1.97	60/1.97	60/1.97
Other data					
Lifter weight (kg/lb):	70/154.32	152/335.1	191/421.08	245/540.13	247/544.4
Min. load (kg/lb):	30/66.14	30/66.14	30/66.14	30/66.14	30/66.14
Max. load (kg/lb):	200/440.92	270/595.25	400/881.85	350/771.62	500/1102.3
Accessories:	AW 401/402	AW 501/502	AW 501/502	AW 601/602	AW 601/602