




COMBO 700

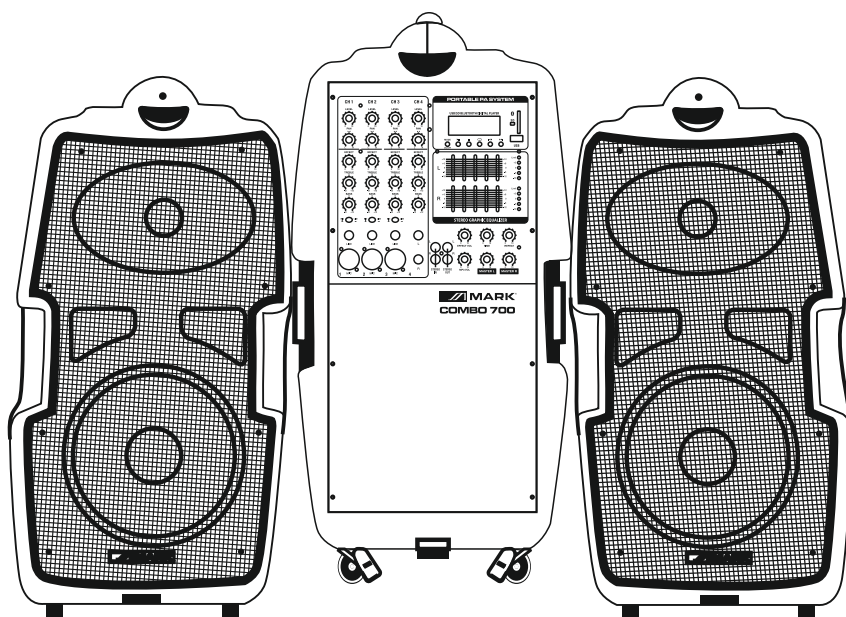

User Manual/Manual de Uso

Rev. 150401

MAIN FEATURES

2 way active portable P.A system with MP3 player (USB/SD), LCD display ,remote control ,Bluetooth .
The system is composed by 2x8" passive loudspeakers, 1x4 channel power mixer, 2 x speaker cable, one microphone with cable.

SPECIFICATIONS

Loudspeaker

Woofer : 8"

Compression driver : 25mm ,titanium

Frequency Response : 60Hz-18KHz

Sensitivity : 94dB


Impedance : 4 OHM

Power of the amplifier : 150W

Mixer

4 channel power mixer with switch power supply , Class-D amplifier ,tone controls and built-in effect with time and repeat controls

FRONT PANEL

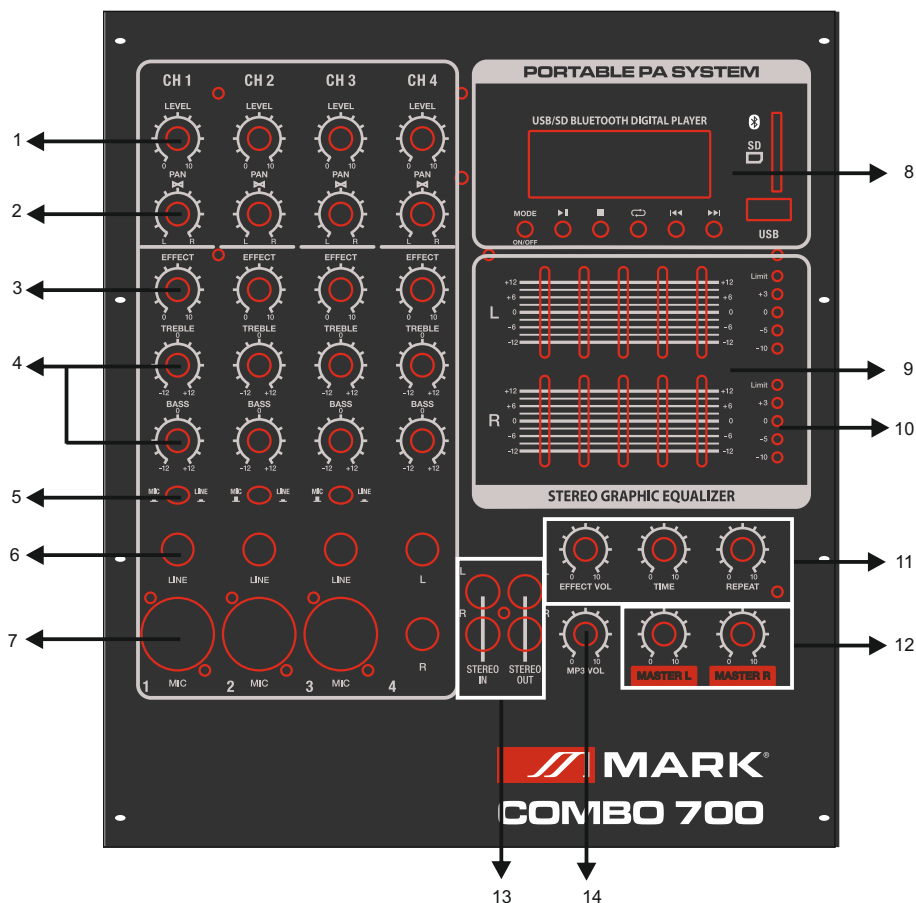

1. LEVEL

This is to adjust the channel volume.

2. PAN

When the knob is in the middle position, the two speakers work, when the knob turns to left, the right loudspeaker will be muted and viceverse when you turn the knob to right position.

3. EFFECT

This knob adjusts the digital effect.

4. EQ (Treble, Bass)

Treble control adjusts high frequencies and bass control adjusts low frequencies.

5. MIC/LINE SWITCH

This switch is to select the input source type on each input.

6. LINE IN


Input connection for high impedance sources like CD players.

7. MIC IN

Input connection for microphone

8. PLAYER INTERFACE

It is possible to play MP3 files from an external USB, Sd device. The LCD display shows all information about tracks and mode selector.



*Bluetooth name on the smartphone: **ZY-BT1**

9. 2x5 BANDS GRAPHIC EQUALIZER

5 bands equalizer for each channel (L & R)

10. SIGNAL INDICATOR

When the system works, the indicator will shine. Please, check to avoid the limit indicator lights, in that case, reduce the volume.

11. EFFECT CONTROLS

These knobs control some features of the built-in effect (Echo time, Repeat and the volume)

12. MASTER L & R

These knobs adjust the total volume level on each channel (L & R)


13. STEREO IN & OUT

These RCA connectors allow to connect a stereo device (IN) or to send the preamp signal to an external device like additional amplifier, etc. (OUT).

14. MP3 VOL

The knob controls the volume of the track in the MP3 interface

REAR PANEL

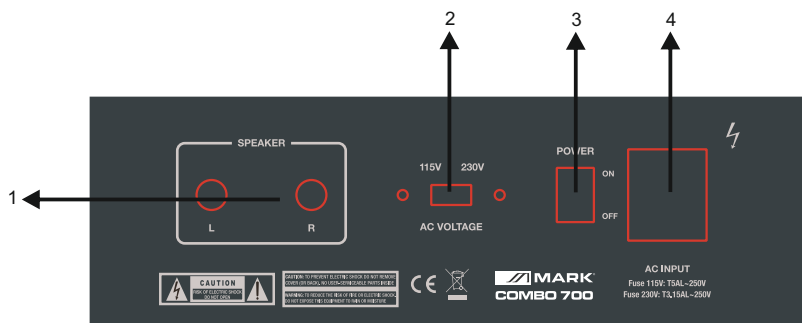

1. LOUDSPEAKER OUTPUTS

Connect each output of the amplifier to the corresponding loudspeaker.

2. AC VOLTAGE SELECTOR

Before connect the device, be sure to check the correct main voltage input

3. POWER SWITCH

Move the switch to ON position to turn on the device.

4. AC SOCKET

Connect the device to an adequate main power connector

CARACTERISTICAS

Sistema activo portátil amplificado de 2 vías con reproductor MP3 (USB/SD), mando remoto, Bluetooth y pantalla LCD. El sistema está compuesto por 2 cajas acústicas con woofer de 8" y tweeter, mezclador autoamplificado de 4 canales, 2 cables de altavoz y un micrófono dinámico con cable.

ESPECIFICACIONES

Caja acústica

Woofer : 8"

Driver : 25mm ,titanio

Respuesta en frecuencia : 60Hz-18KHz

Sensibilidad : 94dB


Impedancia : 4 OHM

Potencia del amplificador : 150W

Mezclador

Mezclador autoamplificado de 4 canales con fuente conmutada, amplificador clase D, controles de tono y efecto incorporado con ajuste de tiempo y repeat

PANEL FRONTAL

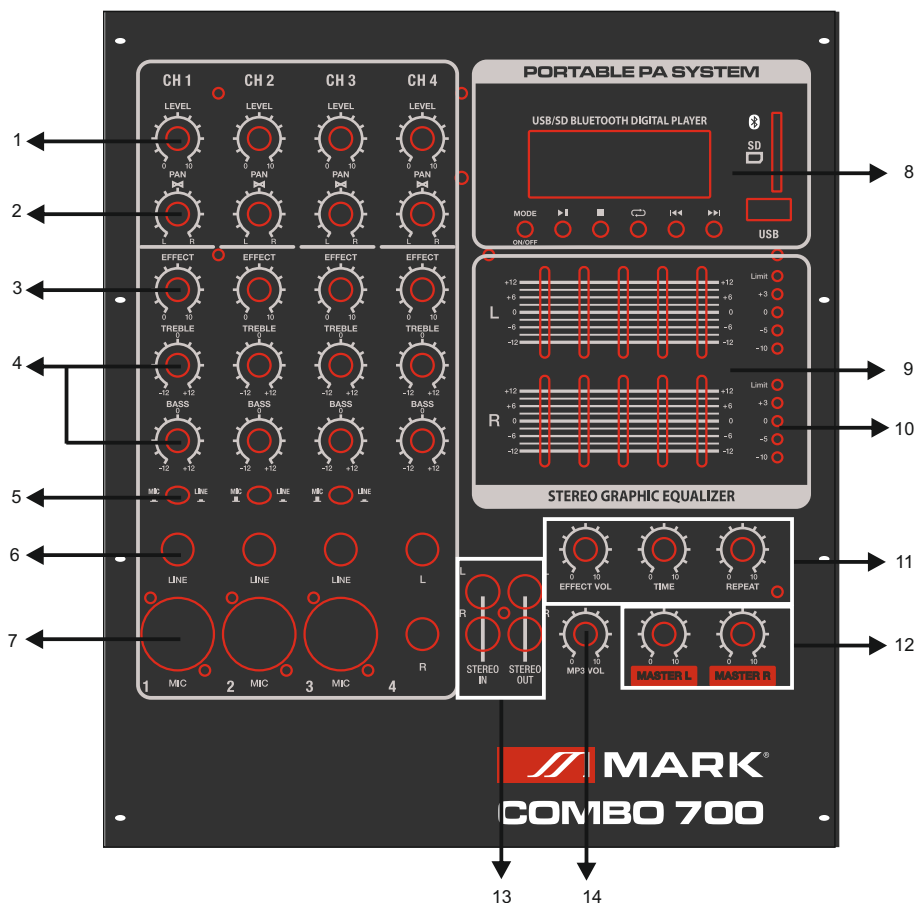

1. LEVEL

Ajusta el volumen del canal.

2. PAN

Cuando el mando está en la posición central, ambas cajas acústicas funcionan. Al girar el mando a la izquierda, la caja acústica del canal derecho se muteará y viceversa al girar el mando a la derecha.

3. EFFECT

Este mando ajusta el efecto digital interno.

4. EQ (Treble, Bass)

El control treble ajusta las frecuencias altas y el mando bass ajusta las frecuencias bajas.

5. CONMUTADOR MIC/LINE

Este conmutador permite seleccionar el tipo de fuente en cada entrada.

6. LINE IN


Conexión de entrada para fuentes de alta impedancia como reproductores de CD.

7. MIC IN

Conexión de entrada para micrófono.

8. INTERFAZ DEL REPRODUCTOR

Es posible reproducir ficheros MP3 procedentes de la toma USB o SD. La pantalla muestra toda la información sobre las pistas y selector de modo.



*Nombre Bluetooth en el smartphone: **ZY-BT1**

9. ECUALIZADOR GRAFICO DE 2x5 BANDAS

Ecualizador de 5 bandas en cada canal (L y R)

10. INDICADOR DE SEÑAL

Cuando el sistema funcione, el indicador se ilumina. Por favor, evite que indicador limit se ilumina, en ese caso reduzca el volumen.

11. CONTROLES DE EFECTO

Estos mandos controlan varias características del efecto interno (Echo time, Repeat y volumen).

12. MASTER L & R

These knobs adjust the total volume level on each channel (L & R)


13. STEREO IN & OUT

Estos conectores RCA permiten conectar un dispositivo estéreo (IN) o enviar la señal preamplificada a un dispositivo externo como un amplificador adicional, etc (OUT).

14. MP3 VOL

Este mando controla el volumen de la pista MP3 ejecutada en el interfaz.

PANEL TRASERO

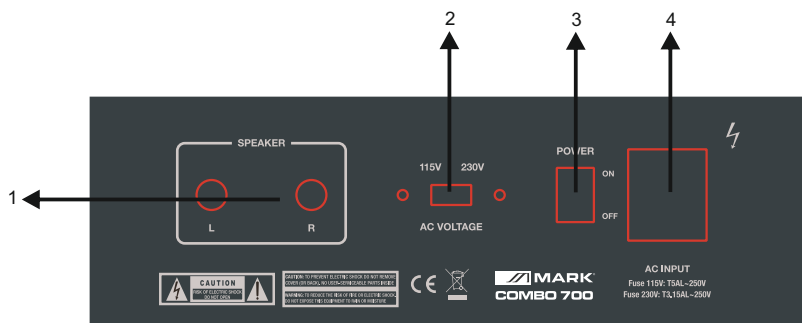

1. SALIDAS DE ALTAVOZ

Conecte cada dalia del amplificador a su caja acústica correspondiente.

2. SELECTOR DE TENSION AC

Antes de conectar el dispositivo, asegúrese de comprobar el valor correcto de alimentación.

3. INTERRUPTOR DE ENCENDIDO

Mueva el conmutador a la posición ON para encender la unidad.

4. TOMA AC

Conecte el dispositivo a una toma adecuada de alimentación.



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

Developed by **EQUIPSON, S.A.**
Avda. El Saler, 14 - Pol. Ind. L'Alteró, 46460 - Silla (Valencia) Spain
Tel. +34 96 121 63 01 - Fax +34 96 120 02 42
www.equipson.es - support@equipson.es