




Datasheet / Ficha técnica

FK35R H

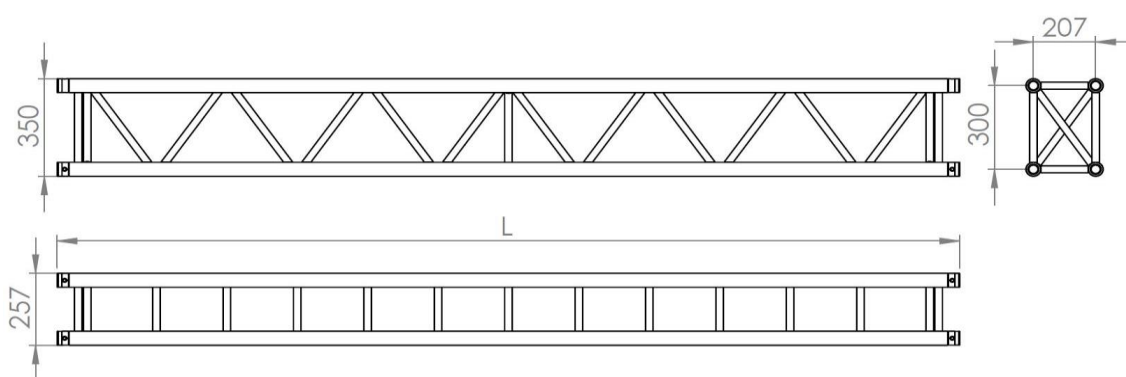

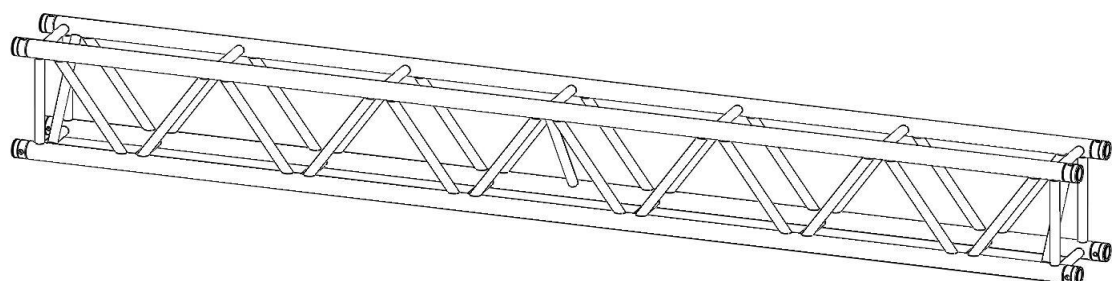

Span (m)	Load (kg/m)	Deflections (mm)	Load x 1 (kg)	Deflections (mm)	Load x 2 (kg)	Deflections (mm)	Load x 3 (kg)	Deflections (mm)	Load x 4 (kg)	Deflections (mm)
2	2451,2	3	2989	3	1791,1	3	1320,3	3	1054,7	3
3	1631,2	7	2372,6	6	1490,1	8	1135,5	7	929,4	7
4	1181,6	13	1958,4	11	1269	13	990,5	12	826	13
5	791,1	21	1662,6	16	1101,4	21	875,3	20	722,9	21
6	546,7	30	1441	24	970,5	30	782,1	28	622,6	30
7	399,3	40	1268,7	32	865,5	41	698,9	38	545,6	41
8	303,7	53	1130,8	42	779,3	54	607,4	50	484,5	53
9	238,1	67	1017,8	54	707,4	68	535,8	64	434,8	67
10	191,2	82	923,3	67	646,3	84	478,1	79	393,5	83
11	156,5	100	843	81	593,7	102	430,4	95	358,6	101
12	130,1	119	773,8	97	548	121	390,4	113	325,3	120
13	109,6	140	712,3	114	507,7	143	356,2	133	296,8	141
14	93,3	162	653	133	471,9	166	326,5	155	272,1	164
15	80,1	187	601	153	439,8	190	300,5	178	250,4	188
16	69,4	213	555	175	410,9	217	277,5	203	231,3	214
17	60,5	241	513,9	199	384,7	245	257	230	214,1	242
18	53	270	476,9	224	357,6	275	238,4	259	198,7	272
19	46,7	302	443,3	252	332,4	307	221,6	289	184,7	304
20	41,3	335	412,6	281	309,4	341	206,3	321	171,9	337

Technical data /Características técnicas	FK35R H
Connection type / Tipo de conexión	CBC50
Section / Sección	35 x 25,7 cm 13,78 x 10,12 in
Weight / Peso	9,7 kg/m 6,52 lb/ft
Main chord / Tubo principal	50 x 4 mm 1,97 x 0,16 in
Braces / Tubo secundario	25 x 3 mm 0,98 x 0,12 in
Standard lengths / Longitudes estándar	0,5 m 1 m 2 m 3 m 1,64 ft 3,28 ft 6,56 ft 9,84 ft
Material	Aluminio Aluminum
Main chord alloy/Aleación tubo principal	EN AW-6082 T6
Brace alloy / Aleación tubo secundario	EN AW-6082 T6
Colors / Colores	Plata / Silver Negro/ Black - RAL9005
Complies with / Cumple con	EN-17115 EN-1090 Eurocodes 0, 1, 3, 9

ACCESSORIES / ACCESORIOS



ATRLPM



FK5 DC



FK5 MC BASE



FK5 MC CUBE



CBCCLIP



FRING