




SUPERMULTIPAR LED 1 20/4

12 X 10W LEDs (4 in 1)


User Manual/Manual de Uso

Rev. 140701

Please read this manual carefully before operating the LED light.

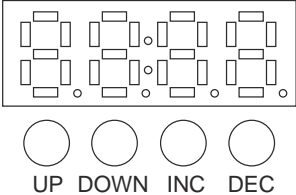

● LED DISPLAY FUNCTIONS

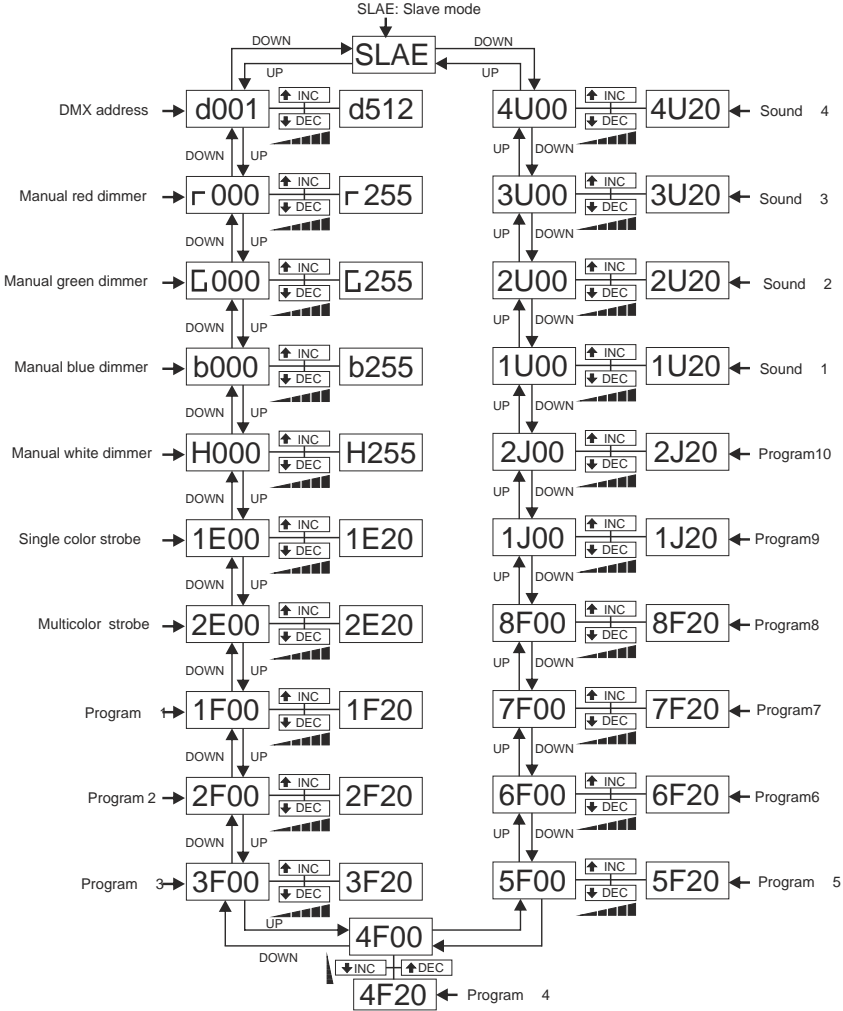

● DMX VALUES AND FUNCTIONS

Channel	Values	Functions
1	0-255	Manual red dimmer 0-100%
2	0-255	Manual green dimmer 0-100%
3	0-255	Manual blue dimmer 0-100%
4	0-255	Manual white dimmer 0-100%
5	0-255	Control the speed and strobe
6	0-255	0-16 no function, 17-255 choose the color. (Channel 1-4 will not work in this mode. Channel 5 control the speed)
7	0-255	1-13 program 1, 14-27 program 2, 28-41 program 3, 42-55 program 4, 56-69 program 5, 70-83 program 6, 84-97 program 7, 98-111 program 8, 112-125 program 9, 126-139 program 10, 140-153 program 11, 154-167 program 12, 168-181 program 13, 182-195 program 14, 196-209 program 15, 210-223 program 16, 224-237 program 17, 238-251 program 18, 252-255 program 19 (Channel 1, 2, 3, 4, 6 will not work in this mode. Channel 5 control the speed)
8	0-255	1-18 program 20, 19-37 program 21, 38-56 program 22, 57-75 program 23, 76-94 program 24, 95-113 program 25, 114-132 program 26, 133-151 program 27, 152-170 program 28, 171-189 program 29, 190-208 sound 1, 209-227 sound 2, 228-246 sound 3, 247-255 sound 4. (Channel 1, 2, 3, 4, 6, 7 will not work in this mode. Channel 5 control the speed.)

● SPECIFICATIONS

Rate Voltage: AC100V-240V 50Hz-60Hz

Rate Power: 104W

Color: RGBW

Lamp: Super bright, 4 in 1 LED lamps

Quantity of Lamp: 12pcs (10W each)

N.W.: 2.5kg




MARK

SUPERMULTIPARLED 120/4


- 2 -

User Manual/Manual de Uso

Por favor, lea este manual cuidadosamente antes de hacer funcionar este proyector LED.

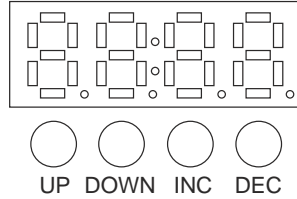

● FUNCIONES DEL DISPLAY

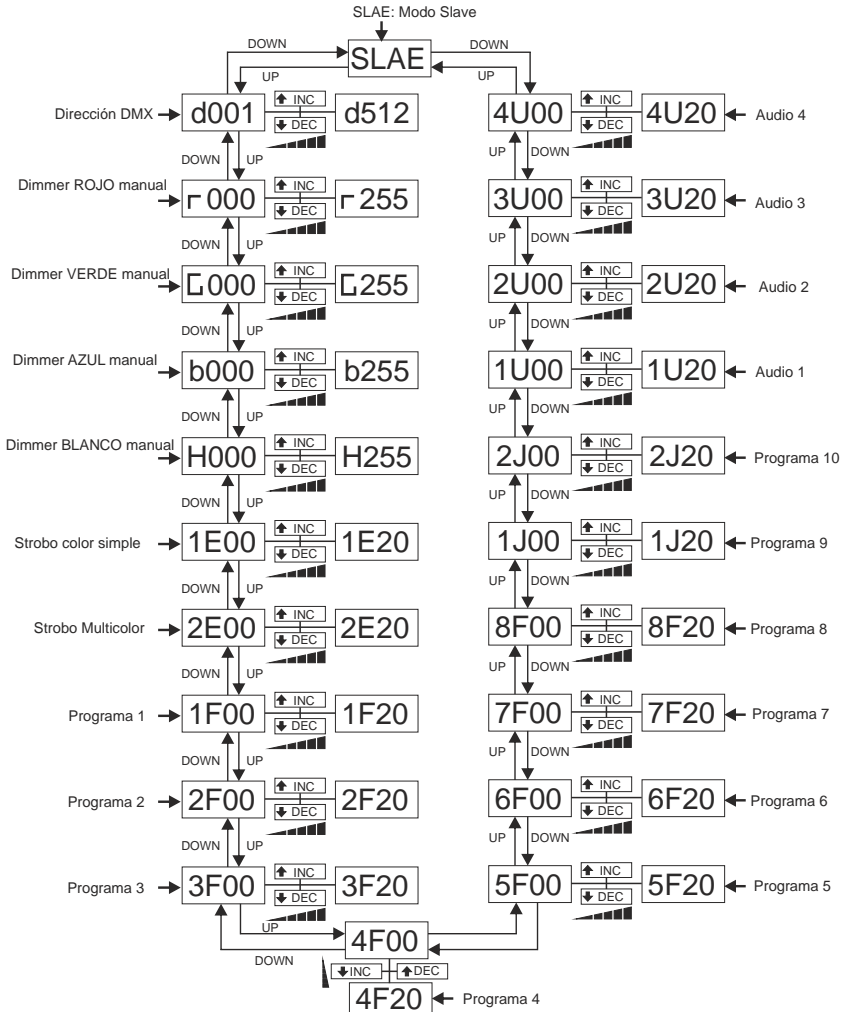

● VALORES DMX Y FUNCIONES

Canal	Valores	Funciones
1	0-255	Dimmer Rojo manual 0 - 100%
2	0-255	Dimmer Verde manual 0 - 100%
3	0-255	Dimmer Azul manual 0 - 100%
4	0-255	Dimmer Blanco manual 0 - 100%
5	0-255	Controla la velocidad del strobo
6	0-255	0-16 sin función, 17-255 elegir el color. (Canales 1-4 no funcionan en este modo .Canal 5 controla la velocidad)
7	0-255	1-13 program 1, 14-27 program 2, 28-41 program 3, 42-55 program 4, 56-69 program 5, 70-83 program 6, 84-97 program 7, 98-111 program 8, 112-125 program 9, 126-139 program 10, 140-153 program 11, 154-167 program 12, 168-181 program 13, 182-195 program 14, 196-209 program 15, 210-223 program 16, 224-237 program 17, 238-251 program 18, 252-255 program 19 (Canales 1,2,3,4,6 no funcionan en este modo. Canal 5 controla la velocidad)
8	0-255	1-18 program 20, 19-37 program 21, 38-56 program 22, 57-75 program 23, 76-94 program 24, 95-113 program 25, 114-132 program 26, 133-151 program 27, 152-170 program 28, 171-189 program 29, 190-208 audio 1, 209-227 audio 2, 228-246 audio 3, 247-255 audio 4. (Canales 1,2,3,4,6,7 no funcionan en este modo. Canal 5 controla la veloc.)

● ESPECIFICACIONES

Alimentación: AC100V-240V 50Hz-60Hz

Consumo: 104W

Color: RGBW

LEDs: LEDs 4 en 1 superbrillantes

Cantidad de LEDs: 12 LEDs (10W cada uno)

Peso.: 2.5kg



EQUIPSON, S.A.

Avda. El Saler, 14 - Pol. Ind. L'Alteró
46460 - Silla (Valencia) Spain

Tel. +34 96 121 63 01 Fax + 34 96 120 02 42
www.equipson.es /equipson@equipson.es