


Model: IC 500T

CEILING SPEAKER




EN



Output selector

IC 500T



Power Taps (70V)	1,5W(3k2Ω)/3W(1k6Ω)
Power Taps (100V)	3W(3k3Ω)/6W(1k6Ω)
Low Impedance position	8Ω
Sensitivity (1W/1m)	92 dB
Frequency Response	110Hz - 18kHz
Dimensions	Ø 203 x 145 mm
Mounting Hole	Ø 170 mm
Material (front baffle)	ABS
Material (grille)	Iron
Weight	1,2 Kg




Specifications are subject to change without notice

Modelo: IC 500T

ALTAVOCES DE TECHO




ES

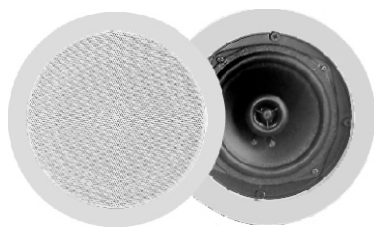

IC 500T

Selector de salida



Posic. de potencia (70V)	1,5W(3k2Ω)/3W(1k6Ω)
Posic. de potencia (100V)	3W(3k3Ω)/6W(1k6Ω)
Posic. baja impedancia	8Ω
Sensibilidad (1W/1m)	92 dB
Respuesta en frecuencia	110Hz - 18kHz
Dimensiones	Ø 203 x 145 mm
Agujero de montaje	Ø 170 mm
Material (panel)	ABS
Material (rejilla)	Iron
Peso	1,2 Kg

Especificaciones sujetas a cambio sin previo aviso