

XS 1401

HEADSET MICROPHONE


XS 1401 has an ergonomic design and a robust fixation system. It is suitable for live shows as it goes unnoticed and provides total freedom of movement on stage.




Technical Specifications

| | |
|--------------------|---------------------|
| Type | Electret Condenser |
| Cartridge Diameter | ∅ 4 mm |
| Polar Pattern | Omnidirectional |
| Sensitivity | 22mv/Pa(-32dB±3dB) |
| Frequency Response | 80 Hz – 20 kHz |
| Impedance | 2.2KΩ±30% |
| Power Supply | 2.0V – 10V DC |
| S/N Ratio | ≥88dB |
| Cable length | 1.2 m |
| Connector type | 3.5 mm female screw |

Frequency Response

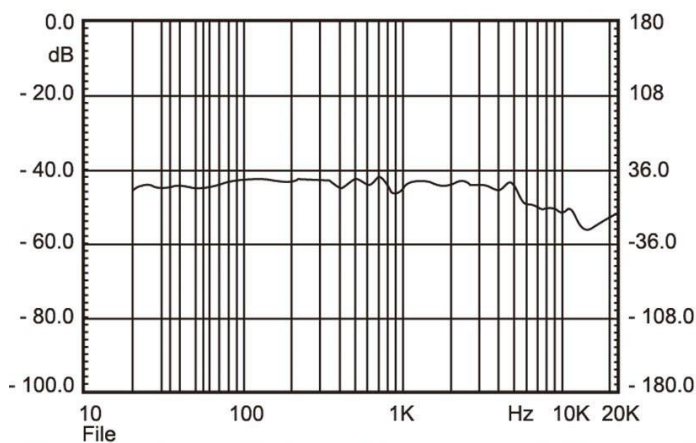

Polar Pattern

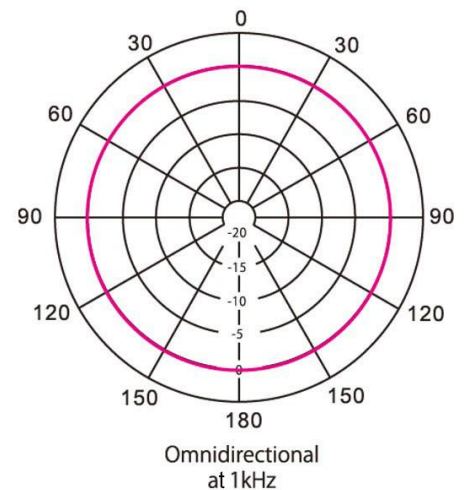

MICRÓFONO DE CABEZA


XS 1401 tiene un diseño ergonómico y un firme sistema de fijación. Es adecuado para espectáculos en vivo ya que pasa desapercibido y ofrece total libertad de movimiento en el escenario.



Especificaciones Técnicas

| | |
|-------------------------|------------------------|
| Tipo | Condensador electret |
| Diámetro de la cápsula | ∅ 4 mm |
| Patrón Polar | Omnidireccional |
| Sensibilidad | 22mv/Pa(-32dB±3dB) |
| Respuesta en frecuencia | 80 Hz – 20 kHz |
| Impedancia | 2.2KΩ±30% |
| Alimentación | 2.0V – 10V DC |
| Relación S/N | ≥88dB |
| Longitud del cable | 1.2 m |
| Tipo de conector | Rosca hembra de 3.5 mm |

Frequency Response

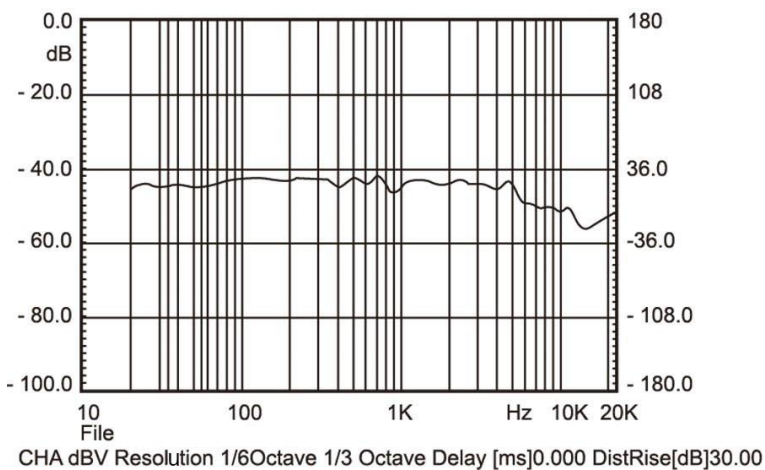

Polar Pattern

