

MMP 10 AT

Amplificador multimedia



MMP 10 AT es un amplificador de 1 HU rack 19" que incorpora además reproductor de audio en múltiples formatos y mezclador con varias entradas.

En el apartado de reproducción, el dispositivo dispone de interfaz USB/SD para ejecución de ficheros externos, conectividad Bluetooth y sintonizador de radio FM, además de controles de avance/retroceso de pista y repeat.

Además de estas fuentes de audio, es posible conectar otros dispositivos externos gracias a los conectores incorporados (MIC+AUX+LINE), dispone además de 5 presets de ecualización y 2 controles de tono.

MMP 10 AT integra un amplificador de 2x 100W rms con protección ante sobrecarga y temperatura.

Lo compacto de la unidad, versatilidad y posibilidad de disponer de un dispositivo que une las características de 3 de ellos (reproductor, mezclador, amplificador), lo hacen muy adecuado en instalaciones fijas donde no sea necesario sobrecargarlo de equipo electrónico y si se busca la funcionalidad del conjunto.


Características

- Amplificador 2 x 100W rms @ 4 Ohm (1 HU rack 19").
- Protección ante sobrecarga y temperatura.
- Interfaz SD/USB, Conectividad Bluetooth, radio FM.
- Reproducción single, continua y repeat.
- Entradas MIC, AUX, LINE (control de ganancia individual) y master general.
- Funcion EQ con 5 presets de ecualización .
- Mando remoto incorporado.
- Controles de tono (bass/treble).
- Salida RCA .
- Alimentación: 230V AC 50/60 Hz.
- Dimensiones: 483 x 44 x 220 mm.
- Peso: 12.2 kg.

Vista trasera



Ejemplo de conexión

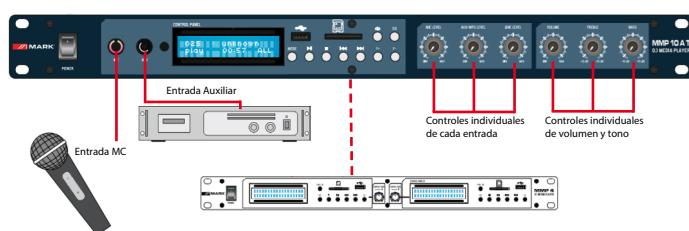

• Ejemplo de conexión aprovechando las entradas MIC, AUX y LINE además de los puertos externos USB y SD.

MMP 10 AT

Multimedia Amplifier



MMP 10 AT is an amplifier, audio player in different formats and mixer with some outputs, in HU rack 19".

In the section part, this device gets an USB/SD interface for play external files from this memories and also connect via Bluetooth or FM radio selection.

Using the control part the user can repeat, advance or go back between tracks.

Apart from this audio source, is possible connect more external devices thanks to incorporates some connectors like (MIC+AUX+LINE), it gets 5 equalization presets and two tone controls.

MMDP 10 AT integrates 2x100W rms amplifier with overload and temperature protection.

This unit is compact and versatile, and possibility of having a device that combines characteristics of 3 of them (players, mixer, amplifier) makes it well suited for fixed installations where it is not necessary overload the space with electronic equipment is the set enough functional.


Features

- Amplifier 2 x 100W rms @ 4 Ohm (1 HU rack 19").
- Temperature and overload protection.
- SD/USB interface, Bluetooth connection and radio FM.
- Single, continue and repeat single functions.
- Input MIC, AUX, LINE (gain control) and master.
- EQ function with 5 presets equalizer levels.
- Remote control incorporate.
- Tone controls (bass/treble).
- RCA output.
- Power supply: 230V AC 50/60 Hz.
- Dimensions: 483 x 44 x 220 mm.
- Weight: 12.2 kg.

Rear View



Connection Example

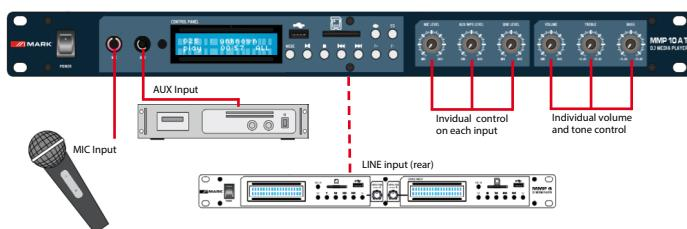

• Connection example exploiting the MIC, AUX LINE and external ports plus USB and SD.