




SUPERMULTIPAR LED 162/3

54 X 3W LEDs (3 in 1)


User Manual/Manual de Uso

Ver. 0119

Please read this manual carefully before operating the LED light.

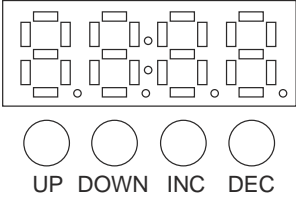

● LED DISPLAY FUNCTIONS

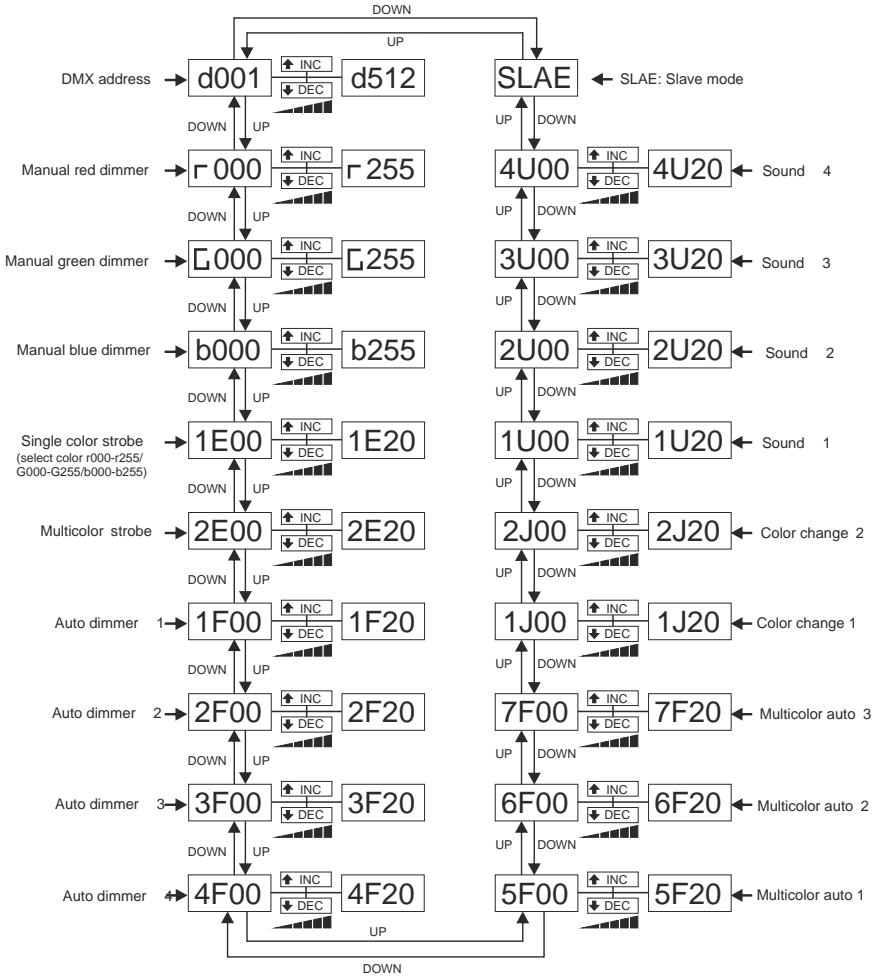

● DMX VALUES AND FUNCTIONS

Channel	Values	Functions
1	0-255	manual red dimmer 0-100%
2	0-255	manual green dimmer 0-100%
3	0-255	manual blue dimmer 0-100%
4	0-255	0-27 no function 28-55 single color strobe (channel 1/2/3 control the color, channel 6 control the speed) 56-83 multicolor strobe (channel 1/2/3 on top value, channel 6 control the speed) 84-255 choose the color
5	0-255	1-90 single color dimmer 91-103 auto dimmer 1 104-116 auto dimmer 2 117-129 auto dimmer 3 130-142 auto dimmer 4 143-155 color change 1 156-168 color change 2 169-181 multicolor auto 1 182-194 multicolor auto2 195-207 multicolor auto3 208-220 sound1 221-233 sound2 234-246 sound3 247-255 sound4 (channel1-4 will not work in this mode. Channel 6 control the speed)
6	0-255	Control the speed
7	0-255	General dimmer

● SPECIFICATIONS

Rate Voltage: AC100V-240V 50Hz-60Hz

Rate Power: 160W


Lamp: Super bright, 3 in 1 LED Lamps

Quantity of Lamp: 54pcs (3W each)


N.W.: 4.5kg



Por favor, lea este manual cuidadosamente antes de hacer funcionar este proyector LED.

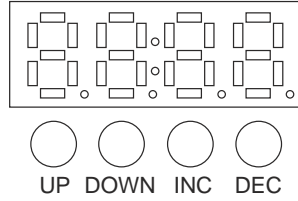

● FUNCIONES DEL DISPLAY

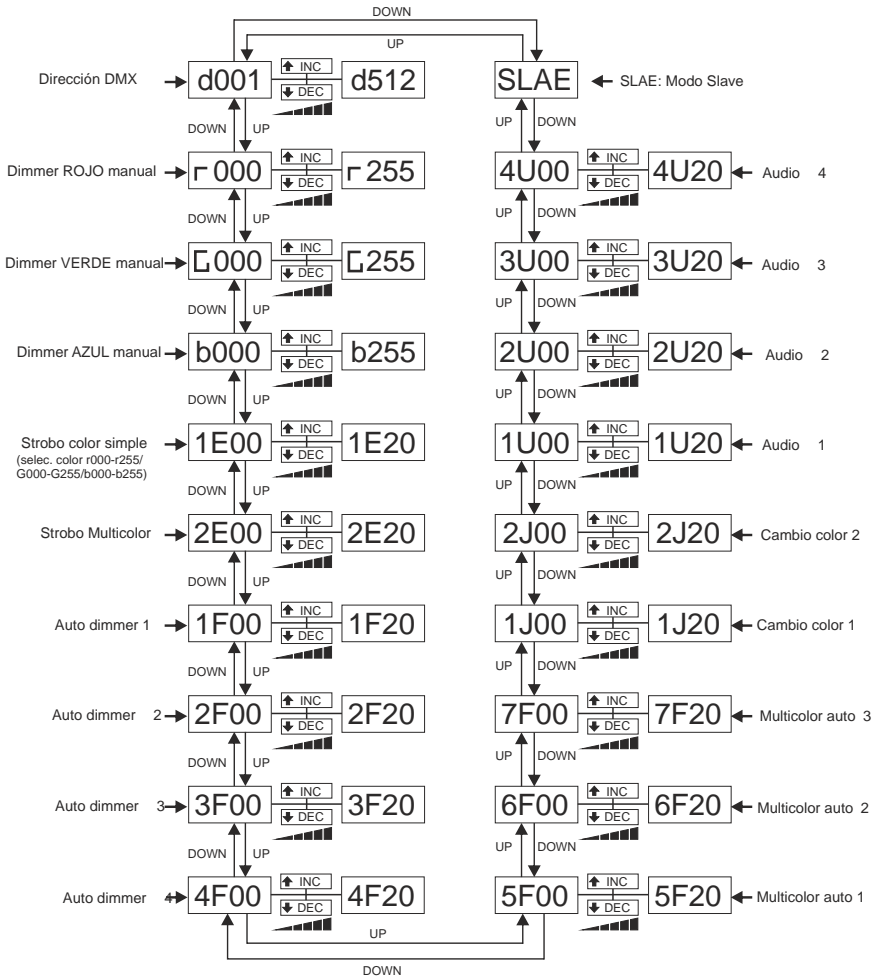

● VALORES DMX Y FUNCIONES

Canales	Valores	Functions
1	0-255	Dimmer rojo manual 0-100%
2	0-255	Dimmer verde manual 0-100%
3	0-255	Dimmer azul manual 0-100%
4	0-255	0-27 sin función 28-55 strobo color simple (canales 1/2/3 controlan el color, canal 6 controla la velocidad) 56-83 strobo multicolor (canales 1/2/3 al valor máximo canal 6 controla la velocidad) 84-255 elige el color
5	0-255	1-90 dimmer color sencillo 91-103 auto dimmer 1 104-116 auto dimmer 2 117-129 auto dimmer 3 130-142 auto dimmer 4 143-155 color change 1 156-168 color change 2 169-181 multicolor auto 1 182-194 multicolor auto 2 195-207 multicolor auto 3 208-220 audio 1 221-233 audio 2 234-246 audio 3 247-255 audio 4 (canales 1-4 no funcionan en este modo. canal 6 controla la velocidad)
6	0-255	Controla la velocidad
7	0-255	Dimmer general

● ESPECIFICACIONES

Alimentación: AC100V-240V 50Hz-60Hz

Consumo: 160W

Color: RGB

LEDs: LEDs 3 en 1 superbrillantes

Cantidad de LEDs: 54 LEDs (3W cada uno)

Peso.: 4.5kg

EQUIPSON, S.A.

Avda. El Saler, 14 - Pol. Ind. L'Alteró
46460 - Silla (Valencia) Spain

Tel. +34 96 121 63 01 Fax + 34 96 120 02 42
www.equipson.es /equipson@equipson.es