


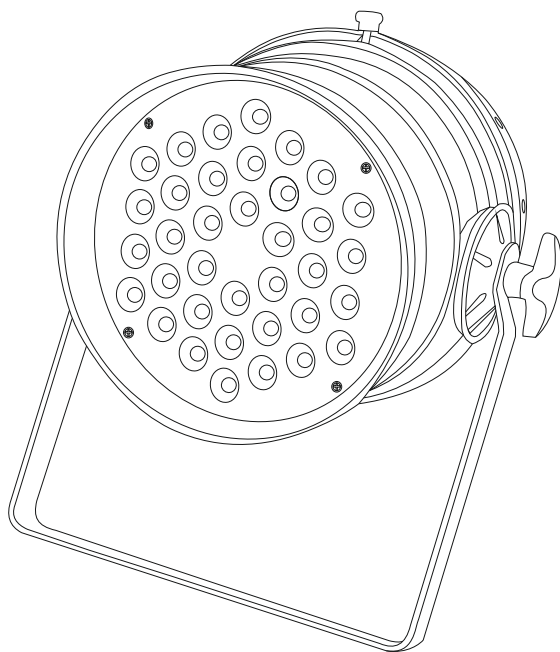


SUPERPARLED 136 S

User Manual / Instrucciones de Usuario


Rev 14.02.01

Please read this manual carefully before operating the LED light.



UP DOWN INC DEC

● LED DISPLAY FUNCTIONS

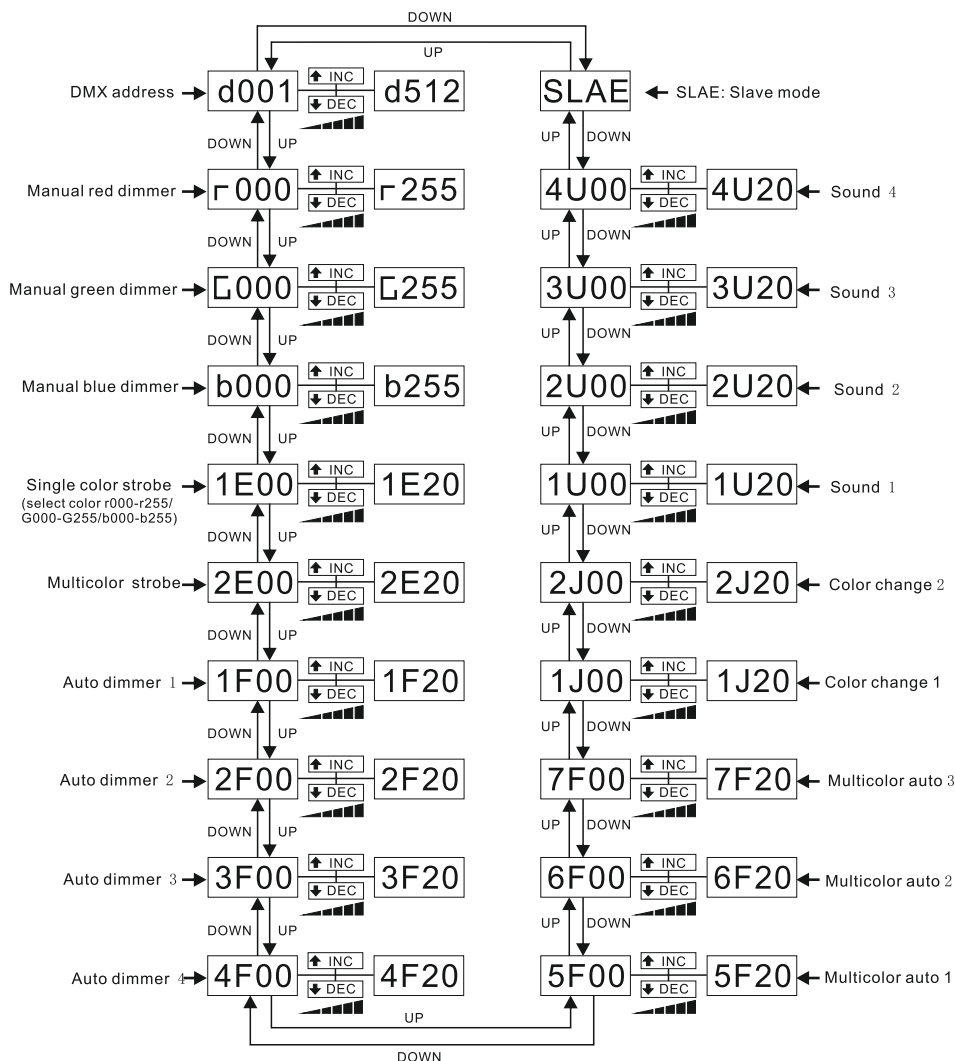

● DMX VALUES AND FUNCTIONS

Channel	Values	Functions
1	0-255	manual red dimmer 0-100%
2	0-255	manual green dimmer 0-100%
3	0-255	manual blue dimmer 0-100%
4	0-255	0-27 no function 28-55 single color strobe (channel 1/2/3 control the color, channel 6 control the speed) 56-83 multicolor strobe (channel 1/2/3 on top value, channel 6 control the speed) 84-255 choose the color
5	0-255	1-90 single color dimmer 91-103 auto dimmer 1 104-116 auto dimmer 2 117-129 auto dimmer 3 130-142 auto dimmer 4 143-155 color change 1 156-168 color change 2 169-181 multicolor auto 1 182-194 multicolor auto2 195-207 multicolor auto3 208-220 sound1 221-233 sound2 234-246 sound3 257-255 sound4 (channel1-4 will not work in this mode. Channel 6 control the speed)
6	0-255	Control the speed

● SPECIFICATIONS

Rate Voltage:AC85V-265V 50Hz-60Hz(Auto-adjust)

Rate Power:60W


Color: RGB

Lamp: Super bright, 1W LED lamps

Quantity of Lamp:36pcs(R12G12B12 PCS)


N.W.:2.7kg

Por favor, lea cuidadosamente el manual antes de poner en marcha este efecto LED



UP DOWN INC DEC

● FUNCIONES DEL DISPLAY

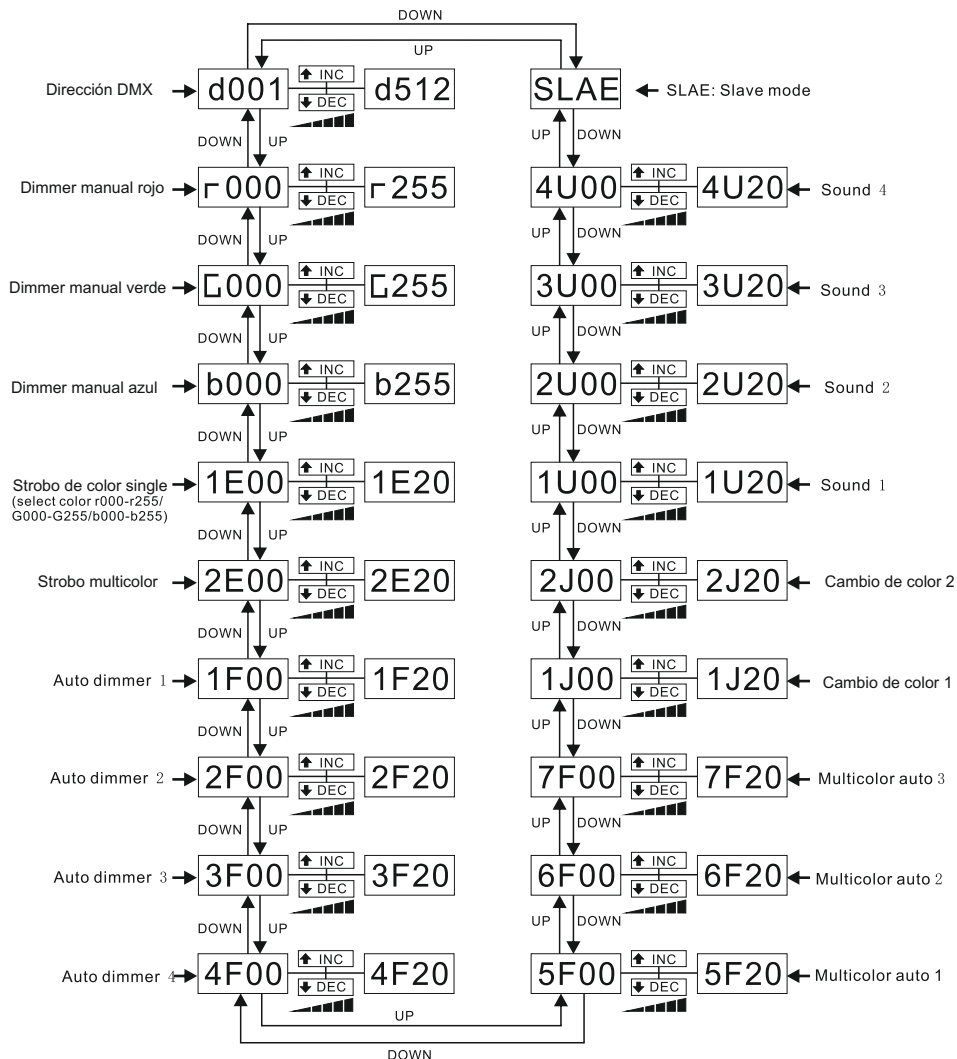

● VALORES DMX Y FUNCIONES

Canal	Valor	Funcion
1	0-255	Dimmer manual rojo 0 -100%
2	0-255	Dimmer manual verde 0 -100%
3	0-255	Dimmer manual azul 0-100%
4	0-255	0-27 sin función 28-55 strobo color simple (canal 1/2/3 controla el color, canal 6 controla la velocidad) 56-83 strobo multicolor (canales 1/2/3 al valor máximo, canal 6 controla la velocidad) 84-255 elige el color
5	0-255	1-90 dimmer color unico 91-103 auto dimmer 1 104-116 autodimmer 2 117-129 autodimmer 3 130-142 autodimmer 4 143-155 cambio color 1 156-168 cambio color 2 169-181 multicolor auto 1 182-194 multicolor auto 2 195-207 multicolor auto 3 208-220 audio 1 221-233 audio 2 234-246 audio 3 247-255 audio 4 (canales 1-4 no funcionan en este modo. canal 6 controla la velocidad
6	0-255	Controla la velocidad

● ESPECIFICACIONES

Alimentación: AC85V-265V 50Hz-60Hz (Auto-ajuste)

Potencia: 60W

Color: RGB

Fuente: LED superbrillantes de 1W c.u.

Cantidad de LEDs: 36pcs(R12. G12. B12)

Peso.: 2.7 kg

EQUIPSON, S.A.

Avda. El Saler, 14 - Pol. Ind. L´Alteró
46460 - Silla (Valencia) Spain

Tel. +34 96 121 63 01 Fax + 34 96 120 02 42
www.equipson.es / equipson@equipson.es