




WPS 310



User Manual/ Manual de uso

Ver. 1.1

WPS 310 PENDANT SPEAKER

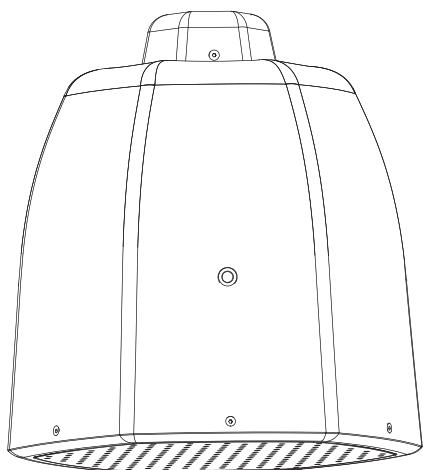


SPECIFICATIONS


- **Coaxial Transducer:** LF: 1x10";
HF: 1x1" compression driver
- **Freq. range:** 96 - 15k5 Hz (± 3 dB)
70 - 19kHz (-10dB)
- **Sensitivity (1W/1m):** 95 dB SPL
- **Nominal Impedance:** 8 Ω
- **Power handling (8 Ω):** 250W AES*
1000W peak
- **Max. SPL (dB@1m):** 119 dB//125 dB
- **Recommended power amplif.:** 500W @8 Ω
- **100V transformer:** 50W
- **Connections:**
100V line: Yellow(+), Black(-), Green & Red linked
8 Ω : Black (-), Red (+), Green & Yellow terminals
NOT connected between them.
- **Nominal Bandwidth 500-4k Hz):** $90^{\circ} \pm 10^{\circ}$ @6dB
- **Material:** Black fiber
- **Finish:** Rough black matte painting
- **Dimensions:** $\varnothing$ 386 x 413 mm
- **Weight:** 9.2 kg

[*] AES 1984 REV. 2003




Built-in Plate with special design for steel pendant cable.

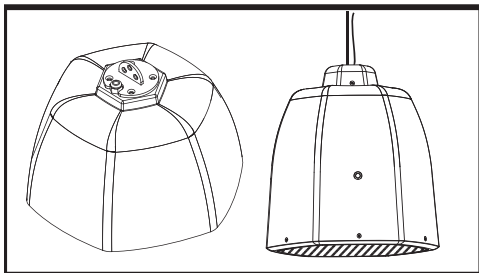


PBU 31 Handle Perfect option to make directional the sound of your WPS 310. (NOT INCLUDED)

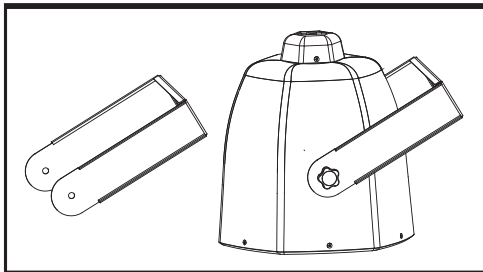


WPS 310 PENDANT SPEAKER

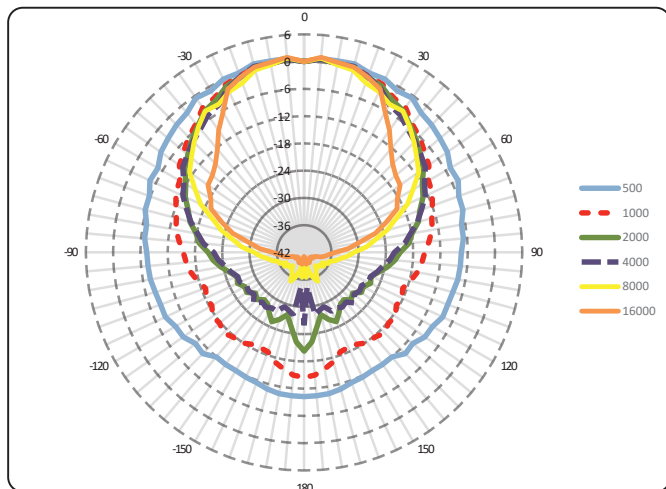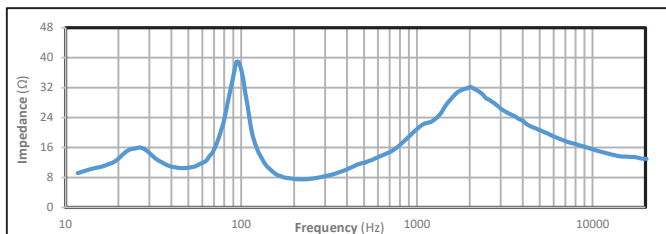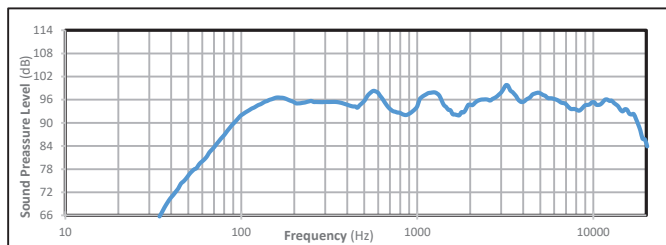

100V line connection

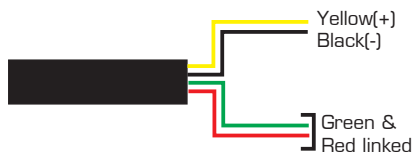


8 Ω connection

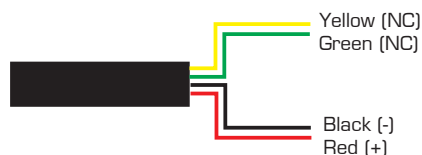

WPS 310


ALTAVOZ DE SUSPENSION

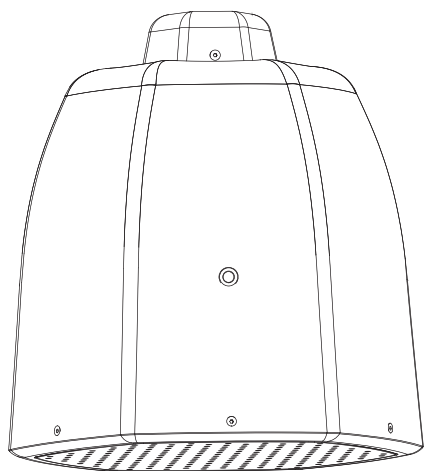

ESPECIFICACIONES

- **Transductor Coaxial:** LF: 1x10";
HF: 1x1" driver de compresión
- **Rango de frec.:** 96 - 15k5 Hz (± 3 dB)
70 - 19kHz (-10 dB)
- **Sensibilidad (1W/1m):** 95 dB SPL
- **Impedancia Nominal:** 8 Ω
- **Potencia manejada (8 Ω):** 250W AES*
1000W peak
- **Max. SPL (dB@1m):** 119 dB//125 dB
- **amplif. de potencia recomend.:** 500W @8 Ω
- **Transformador 100V:** 50W

Pletina incorporada: con un diseño especial para utilizar un cable de acero

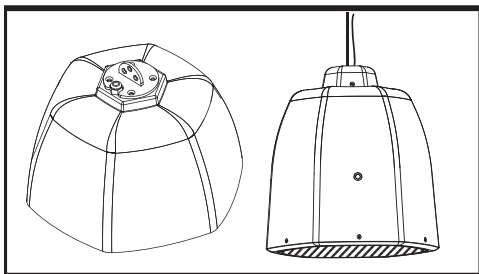


- **Conexiones:**
100V line: Amarillo (+), Negro (-), Rojo/Verde unidos
8 Ω : Negro (-), Rojo (+), Terminales Amarillo y Verde, **NO** conectados entre ellos




- **Ancho de banda 500-4k Hz):** $90^{\circ} \pm 10^{\circ}$ @6dB
- **Material:** Fibra
- **Acabado:** Pintura negra mate
- **Dimensiones:** $\varnothing$ 386 x 413 mm
- **Peso:** 9.2 kg

Asa PBU 31: Opción perfecta para direccionar el sonido de su **WPS 310** (OPCIONAL)


(*) AES 1984 REV. 2003

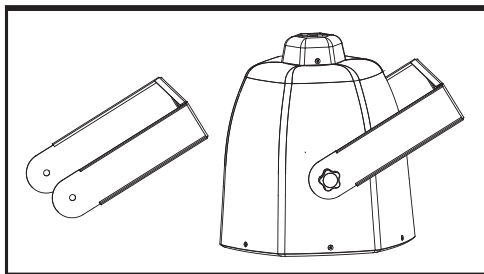


WPS 310 ALTAVOZ DE SUSPENSION

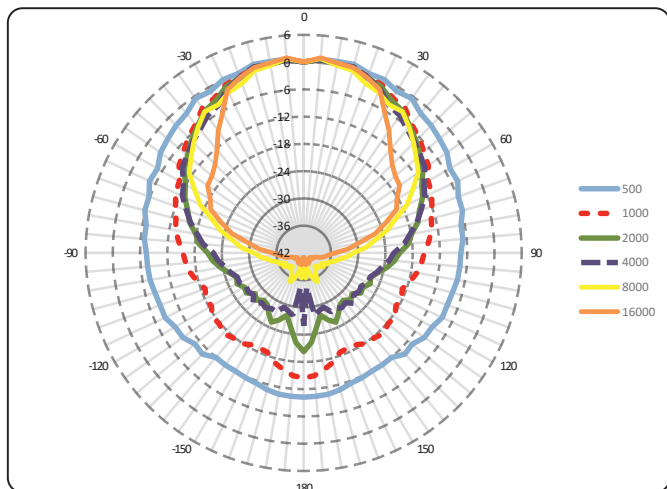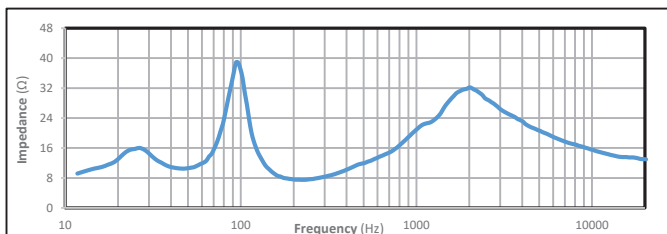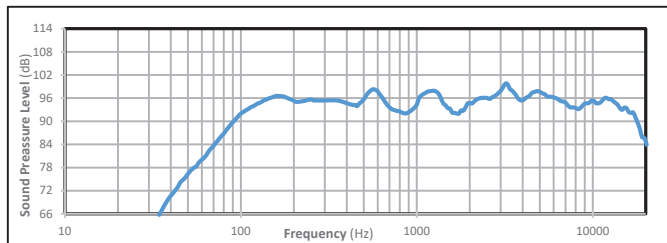

Conexión línea 100V

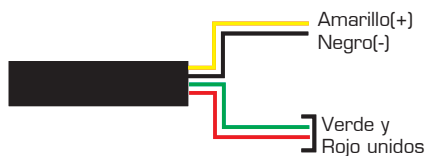

Conexión 8 Ω

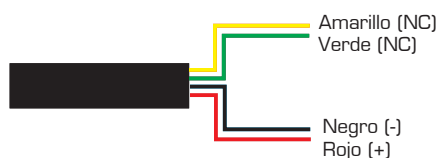



EQUIPSON, S.A.

Avda. El Saler, 14 - Pol. Ind. L'Alteró, 46460 - Silla (Valencia) Spain

Tel. +34 96 121 63 01 Fax + 34 96 120 02 42

www.workproaudio.com support@work.es